

LT6911GX --- Product Brief

HDMI2.1 to Quad-port MIPI DSI/CSI with Audio

Features

● HDMI2.1 Receiver

- Compliant with the HDMI 2.1 specification
- Support FRL mode with 3, 6 or 8Gbps Data Rate
- Support HDCP 1.4/2.2/2.3
- Support HDR
- Support FEC
- Support SCDC
- Support 8k@30Hz, 8k@60Hz with DSC

● Single/Dual/Quad-Port MIPI® DSI/CSI Transmitter

- Compliant with D-PHY1.2 & DSI 1.3 & CSI-2 1.3 , C-PHY1.0 & DSI-2 1.0 & CSI-2 2.0
- 1/2/4 configurable port
- D-PHY: 1~4 Configurable Data Lanes per port
- C-PHY: 1~3 Configurable Data Lanes per port
- D-PHY: 2.5Gb/s per data lane
- C-PHY: 5.7Gb/s per data lane
- Data lane and polarity swapping
- Support video overlap
- Support RGB/YUV4:2:2/YUV4:4:4/YUV 4:2:0 8/10bit Video Format
- Video stream copy mode for each single/dual-port
- Side-by-side 3D support
- Support CSI D-option 8 Lane output
- Port swap

● LPDDR 3/4 Controller

- Compliant with JESD209-3C and JESD209-4
- Band Width up to 2133Mbps
- Support X16 SDRAM Organization
- Programmable CAS Latency
- BL8 Supported Only
- Programmable Output Driver Impedance

- Support ZQ Calibration
- Byte and Lane Swappable

● Miscellaneous

- 3.3V/1.1V Supply Power
- VESA DSC v1.2a (v1.1 compatible)
- Zoom scaling up and down
- CSC: RGB <-> YUV444 <-> YUV422<-> YUV420
- Support SPDIF and 8-channel IIS audio output
- Support 100KHz and 400KHz I2C slave
- Integrated Microprocessor
- Embedded EDID shadow.
- Temperature Range: -40°C ~ +85°C
- ESD 4kV HBM
- Embedded LPDDR3/4 DRAM
- Packaged in BGA169 8mm x 8mm

Description

The LT6911GX is a high performance HDMI2.1 to MIPI®DSI/CSI chip for VR/Display application.

For MIPI output, LT6911GX features configurable single-port or dual-port or quad-port MIPI®DSI/CSI with 1 high-speed clock lane and 1~4 high-speed data lanes operating at maximum 2.5Gb/s/lane with D-PHY, which can support a total bandwidth of up to 40Gbps. Or support 5.7Gb/s/lane with C-PHY, which can support a total bandwidth of up to 68.4Gbps.

LT6911GX internally integrates an 8-bit OCM and SPI flash memory (stacked die) to run program. Online software upgrade is also supported for LT6911GX.

LT6911GX is fabricated in advanced CMOS process and implemented in 8mmx8mm BGA169 package. This package is RoHS compliant and specified to operate from -40°C to +85°C.

Applications

- VR
- Display

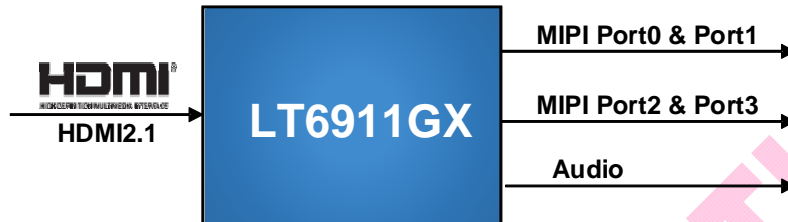


Figure1. Application Diagram

Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method
LT6911GX	-40°C to+85°C	BGA169 (8*8)	Tray

Copyright © 2019 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com