

LT6711 --- Product Brief

HDMI2.0 to DP1.2 with Type-C

1. Features

● HDMI2.0 Receiver

- Compliant to HDMI2.0 Standard
- Support 3D Video Data Stream
- Support HDCP1.4/2.2
- Support HDR
- Support Resolution up to 4Kx2K@60Hz
- Support 8/10/12-bit Deep color
- Support DDC and CEC
- Support Hot-Plug Detect
- Support Status and Control Data Channel (SCDC)
- Support Data Lane Swap and Polarity Swap
- Build-in Pattern Generation

● DP1.2 Transmitter

- Compliant to VESA DP1.2 Standard
- Support Four Lanes with 1.62Gbps (RBR), 2.7Gbps (HBR) or 5.4Gbps (HBR2) Data Rate
- Support Resolution up to 4Kx2K@60Hz
- Data Lane and Polarity Swapping
- Support HDCP1.3 Encryption
- Support 8/10/12-bit Deep Color
- Support Hot-Plug Detect
- Optional SSC 0.5% Down-Spreading Output
- Configurable and Power-on-Calibrated Output Swing for Optimized EMI
- Internal Rterm Calibration with Less than 5% Error
- Support Backlight Control & MCCS over AUX for eDP
- Build-in Pattern Generation

● Full-Featured USB Type-C

- Compatible with USB3.1 Gen1, USB Type-C R1.2, DP Alt Mode V1.0 and USB PD R3.0
- 2 Data Roles Supported: DFP and UFP
- 3 Power Roles Supported: SRC, SNK and DRP
- USB PD-PHY (Tx/Rx) and BMC Encoding/Decoding
- USB PD Protocol Control by Software
- Bi-directional Active Switch for USB3.1 Gen1 SS Channel
- USB Full-Featured, Orientation and Role Detection
- 3-level Current Ability Advertise (Host Mode) or Detection (Device Mode) for Type-C Power: USB Default, 1.5A@5V, 3A@5V
- Support FR_Swap

- SBU Data Path Control for DP Alt Mode
- Dead Battery Support When No Power Applied
- Support Standby Mode for Low-Power Operating

● USB Type-C Charging Port

- Compatible with USB Type-C R1.2 and USB PD R3.0
- Only SNK Mode is Supported
- Dead Battery Support When No Power Applied

● Miscellaneous

- Support OSD display with 8K Programmable Dot Matrix and Attribute Table
- 1.2V/1.8V/3.3V Dual Supply Power
- External 27MHz Crystal Reference Clock
- Temperature Range: -40°C to +85°C
- Packaged in BGA81 5mm x 5mm, 7.5mm x 7.5mm QFN64
- Power Consumption: **TBD**

2. General Description

LT6711 is a deeply-optimized HDMI re-driver IC that enhances TMDS signal quality by performing cable or board trace loss compensation. LT6711 can be configured to work under HDMI1.4b with up to 3.4Gb/s data rate or HDMI2.0 standard with maximum 6Gb/s data rate to allow for the highest resolutions of 4Kx2K 60Hz or 1080P with higher refresh rates.

The input receiver of LT6711 features a multi-level programmable linear equalizer that can support maximum 25dB loss compensation due to Inter-Symbol Interference (ISI). The output transmitter re-drives the received signal with multi-level programmable output swing and up to 6dB de-emphasis.

The Build-in DDC interception function, co-working with an accurate frequency detect on clock channel is also included to automatically setup re-driver parameters.

LT6711 internally integrates an 8-bit OCM and SPI flash memory (stacked die) to run program. Online software upgrade is also supported for LT6711.

LT6711 is fabricated in advanced CMOS process and implemented in a small outline 5mmx5mm BGA81 (LT6711B) and 7.5mmx7.5mm QFN64 (LT6711A) package. This package is RoHS compliant and

specified to operate from -40°C to +85°C.

3. Applications

- Mobile systems, VR/AR
- Cellular handsets, PAD/Tablets
- Digital video cameras
- Digital still cameras

4. Ordering Information

Table 4.1.1 Ordering Information

Part No.	Operating Temp. Range	Package	Packing
LT6711A	-40°C to +85°C	QFN64 (7.5*7.5)	Tray
LT6711B	-40°C to +85°C	BGA81 (5*5)	Tray

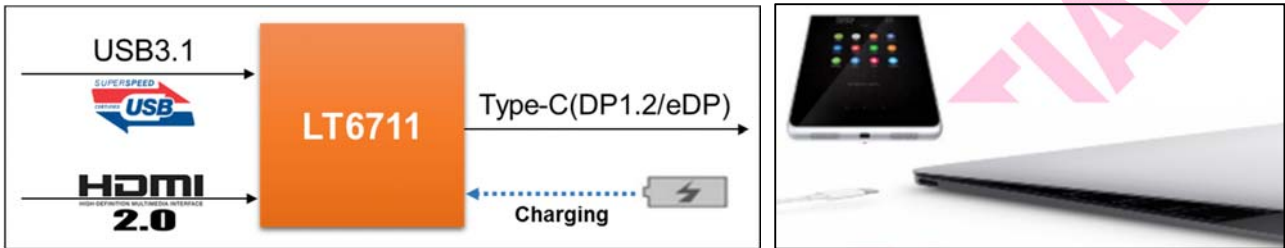


Figure 1. LT6711 Typical Application Diagram

Copyright © 2018 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com